


CRL Glass Awning Support System


System Components

Stainless Steel Mounts (A and B) and Pivots (C) are contained in the GAS190BS Mounting Kit. Order Connecting Rods (D) to suit panel width and application conditions.

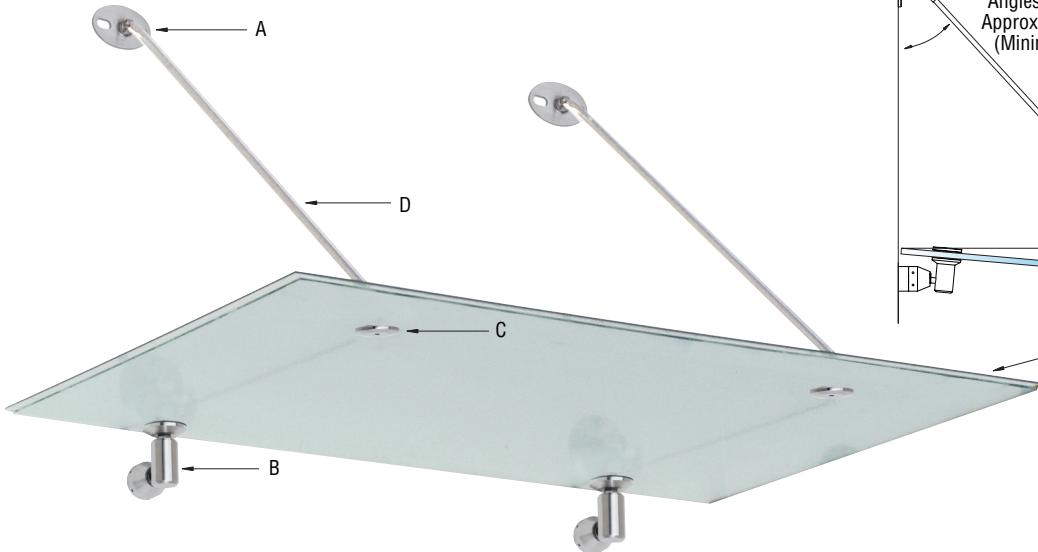


Typical Installation Conditions

The slope of the Awning Panel is limited to a maximum of a 5 degree negative slope from level.

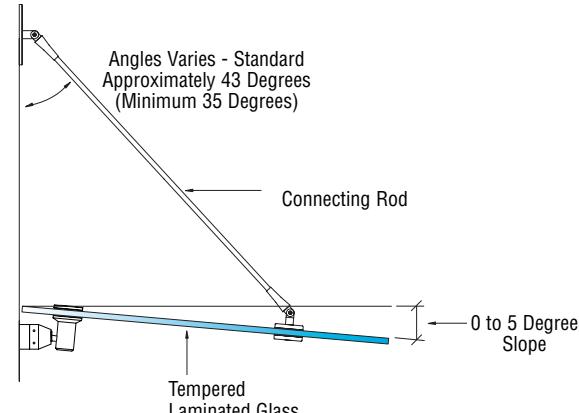

Fabrication and Dimensional Information for Awning Panel

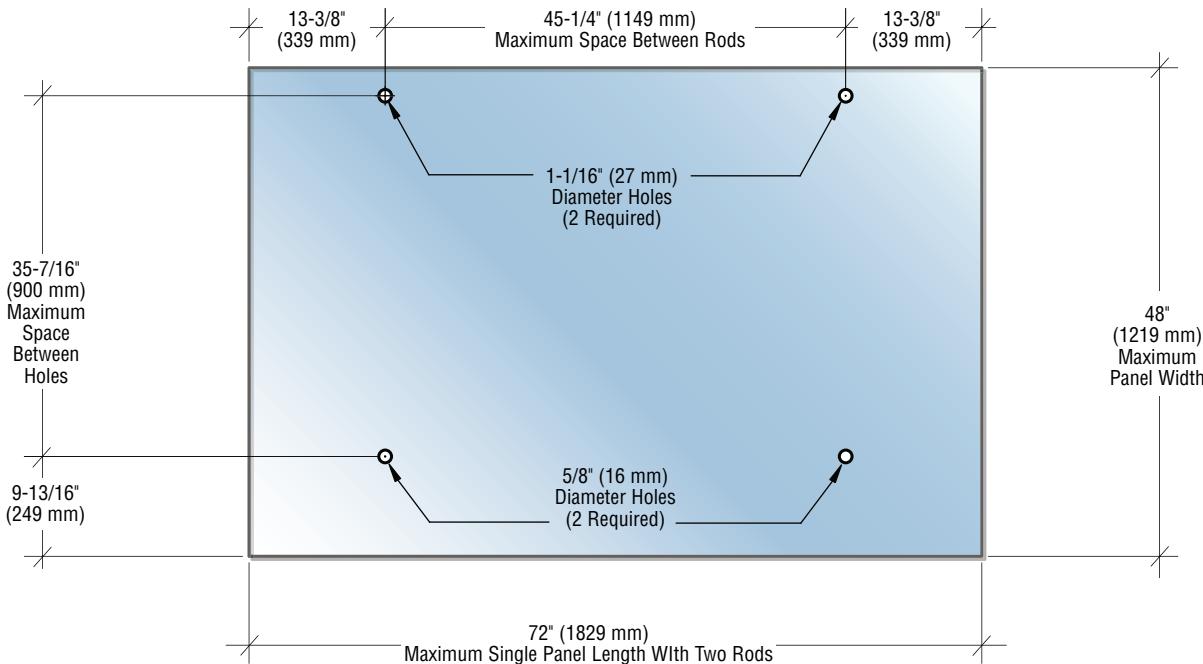

Fabrication of Laminated Units

Awning Panels are constructed using:

- 1/4" (6 mm) tempered glass
- .060" (1.5 mm) interlayer
- 1/4" (6 mm) tempered glass

All of the edges should be polished.

For more information on our Glass Awning System, or for a quote, contact CRL Architectural and Ornamental Metals Technical Sales at (800) 421-6144 in the U.S., (877) 421-6144 from Canada, or (323) 588-1281 International, and ask for Ext. 7770. You can also e-mail us through our web site at crlaurence.com. From the home page click on Contact Us, and then click on Technical Sales.