



Ref: OPS19DEUK

C.R. Laurence Co., Inc.

4/2020 Edition 250

Corporate Headquarters
2503 E. Vernon Ave.
Los Angeles, CA 90058-1826

Toll Free Phone (800) 421-6144
International Phone (323) 588-1281



GLASS PARTITION SYSTEM FALLBROOK® & XL® & NY®

Glass systems by CRL. Quality by CRL.



GLASS PARTITION SYSTEM FALLBROOK® & XL® & NY®



PLANNING AND CUTTING AVAILABLE


Advantages:

- ◆ Sound insulation
- ◆ Easy hinge mounting (no drilling)
- ◆ No sealing
- ◆ Solutions with cable guidance possible
- ◆ Door 8-12 mm (also laminated safety glass)
Fixed parts 8-28 mm (also laminated safety glass)
- ◆ Stock finishes: satin, brushed nickel, matt black anodized
- ◆ RAL powder coat finishes available by special order
- ◆ Auto bottom seal option available
- ◆ Pollmeier Smart Entrance
- ◆ Halogen- and PVC-free gaskets

NEW: You will find all products on our webpage.



Assembly instructions now also on our YouTube channel.



Tested and certified products.

All our systems are subject to strict guidelines for optimal customer satisfaction. CRL - always up to date.



PLANNING AND CUTTING AVAILABLE



FALBROOK® SYSTEM

Falbrook Series Office Partition System




is a dry glazing system. It includes a frame and door frame system that is easily assembled and installed producing maximum transparency.

ADVANTAGES

- ◆ No wet sealing necessary
- ◆ Door hinge fully height-adjustable, no drilling necessary
- ◆ Sound reduction
(No open joint between glass door, sidelite, and transom)
- ◆ Matching frame profile for glass/glass and glass/wall
- ◆ Glass door 5/16" - 1/2" (8-12 mm)
- ◆ Glass sidelite 5/16" - 1/2" (8-12 mm)


APPLICATIONS

- ◆ Office glazings and glass partition walls
- ◆ Interior glazings for private homes
- ◆ Practices and chambers
- ◆ Hotels and spas
- ◆ Smoking areas

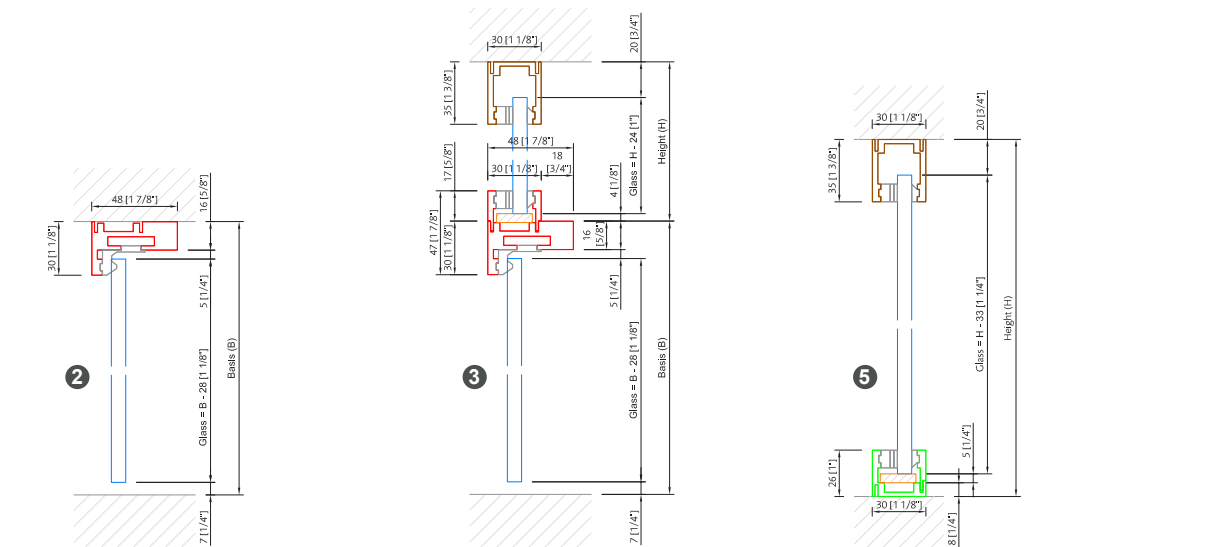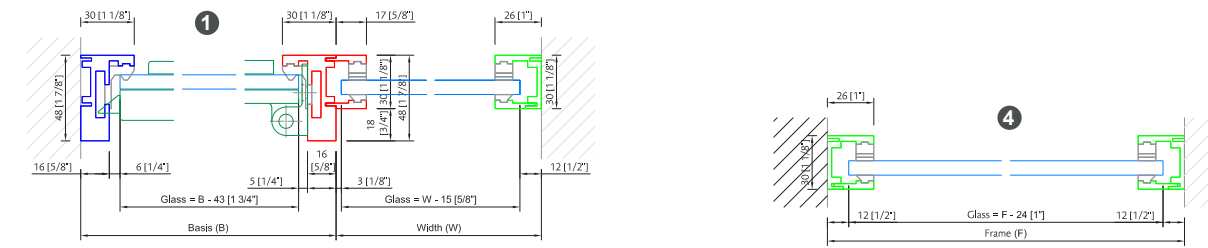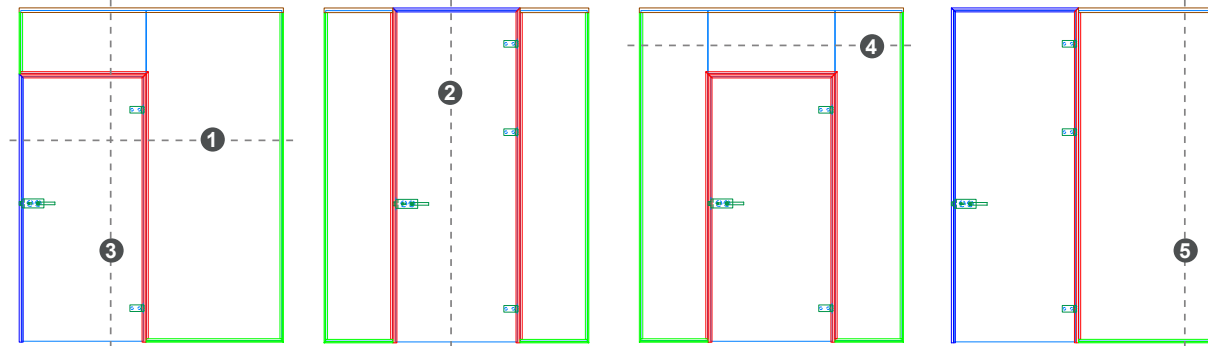


Door frame profiles **

Door Jamb/Header at Sidelite/Transom

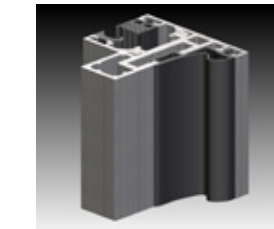

Door Jamb/Header



Aluminium profile, gasket TPE

Glass door: 5/16-1/2" | 8-12 mm

Glass side panel: 5/16-5/8" | 8-16 mm

Stock finishes: satin, brushed nickel, matt black anodized
RAL powder coat finishes available by special order


Gasket: grey, black

Details on pages 16-17




Fixed glass profiles **

Wall and Sill



Header



Aluminium profile, gasket TPE

Glass: 5/16-5/8" | 8-16 mm


Stock finishes: satin, brushed nickel, matt black anodized
RAL powder coat finishes available by special order

Gasket: grey, black

Details on pages 16-17



GLASS PARTITION SYSTEM FALLBROOK **

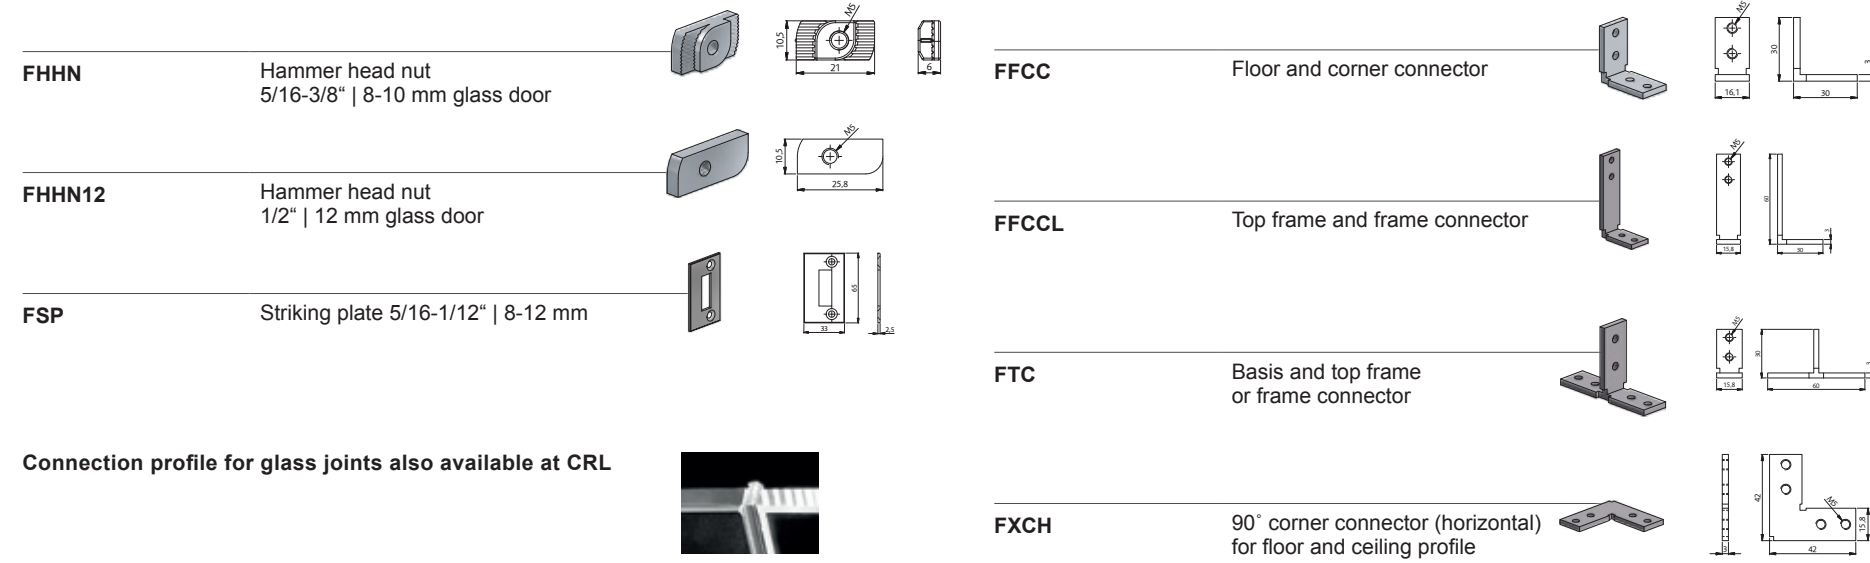

USER TIPS

Using the glass partition system to its best ability

- ◆ Maximum dimensions of system (reference values):
Doors: width 36" | 900 mm – height 119" | 3.000 mm
Fixed parts: width no limit – height 56" | 3.400 mm
- ◆ Cable channel and switches
- ◆ Easy assembly
- ◆ Height adjustment possible

Any questions?
 Call us now:
 Toll free phone
 (800) 421-6144







**
 VERSATILE AND
 EASY TO CONNECT



FALLBROOK® XL SYSTEM


APPLICATIONS

- ◆ Office glazings and glass partition walls
- ◆ Interior glazings for privat homes
- ◆ Practices and chambers
- ◆ Hotels and spas
- ◆ Smoking areas

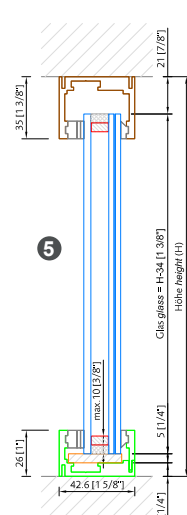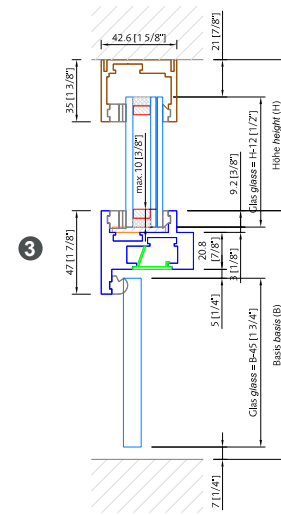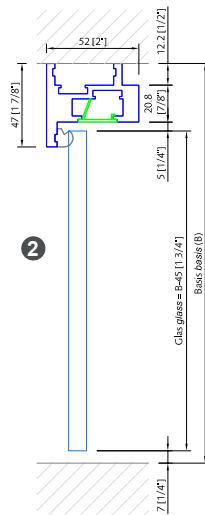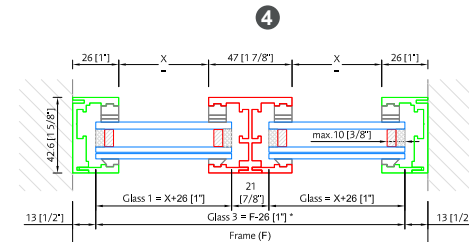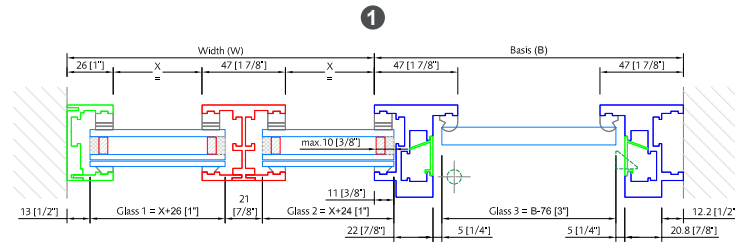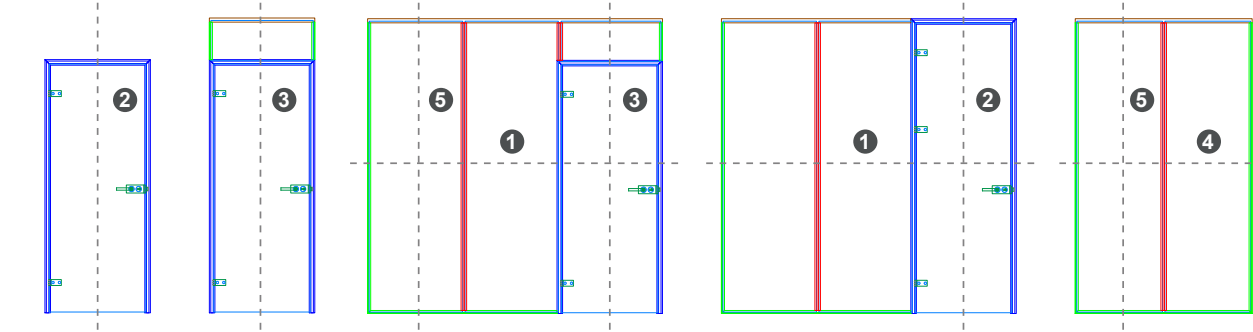


Door frame XL profiles **

Door Jamb/Header at Sidelite/Transom

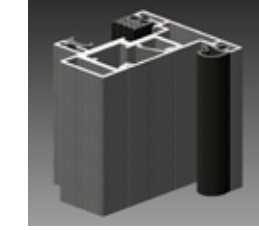

Door Jamb/Header

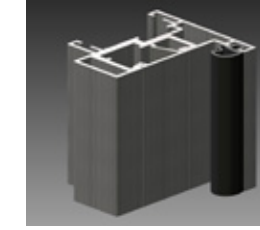


Aluminium profile, gasket TPE
Glass door: 10-12 mm
Glass side panel: 20-28 mm
 Need to add adaptor for thinner glass at fixed
Stock finishes: satin, brushed nickel, matt black anodized
 RAL powder coat finishes available by special order
Gasket: grey, black


Details on pages 18-19

Fixed glass XL profiles **


Wall and Sill



Intermediate Vertical



Header



Aluminium profile, gasket TPE
 Glass side panel 20-28 mm
 Need to add adaptor for thinner glass at fixed
Stock finishes: satin, brushed nickel, matt black anodized
 RAL powder coat finishes available by special order
Gasket: grey, black

Details on pages 18-19



FALLBROOK XL FITTINGS & ACCESSORIES **

FXHHN	Hammer head nut XL 3/8-1/2" 10-12 mm	
FXSP	Striking plate XL 3/8-1/2" 10-12 mm	
FFCC	Floor and corner connector	
FFCCL	Frame XL and top frame XL or basis XL connector	
FXCH	90° corner connector (horizontal) for floor and ceiling profile	
FXCZ	Basis and top frame or frame connector	




USER TIPS


Office cable channel




Sound insulation to EN ISO 10140



SETUP A
Glass door incl. drop-down seal
with glass side panels and fanlight



SETUP B
Wooden sound-proof door incl.
drop-down seal with glass side
panels and fanlight



SETUP C
Fixed glazing

The achievable sound insulation value depends on the used glass thickness, glass construction in case of installed double glazing, connection to the structure, as well as on the building acoustic properties of the flanking building parts. We will be pleased to advise you personally.



FALLBROOK® NY SYSTEM

Using the glass partition system XL New York to its full ability

Based on the Fallbrook XL system - integrating all advantages.

- ◆ Glass: 8 to 28 mm
- ◆ Special adapter profile Frame Plus XL
- ◆ Free positioning of vertical and horizontal profiles
- ◆ Glass partition XL frame system can be integrated easily
- ◆ Simple Plug & Play solution
- ◆ System is installed without notches (Easy assembly, no special tools)
- ◆ System screw-based and dry-glazed
- ◆ All profile connections with standard-angle connector from glass partition system series

◆◆
**SIMPLE PLUG & PLAY
SOLUTION AVAILABLE**



System components


FXNYK Clamping head



Adapter profile Frame Plus



Length: 3 or 6 meters

Surface finishes: satin anodized or matte black anodized

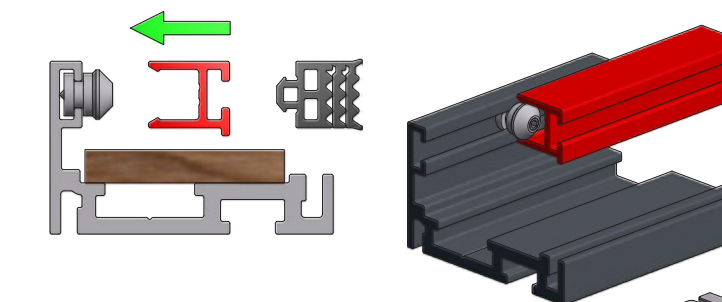

Block

Surface finishes: satin anodized or matte black anodized

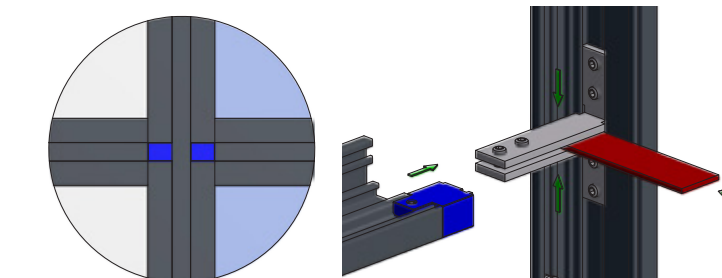

Details on pages 18-19

FITTINGS & ACCESSORIES - ALL GLASS PARTITION SYSTEMS

Item no.	Finishes	Description - Fittings
FHSSA	Aluminum anodized	Door hinge, square not self-closing
FHSBN	Stainless steel	
FHDSA	Aluminum anodized	Door hinge, round not self-closing
FHDBN	Stainless steel	
FLKSSA	Aluminum anodized	Lock case, square incl. Europrofile cylinder
FLKSBN	Stainless steel	
FLKDSA	Aluminum anodized	Lock case, round incl. Europrofile cylinder
FLKDBN	Stainless steel	
FLSSA	Aluminum anodized	Lock case, square non-locking
FLSBN	Stainless steel	
FLDSA	Aluminum anodized	Lock case, round non-locking
FLDBN	Stainless steel	
FLHSA	Aluminum anodized	Set of levers, square*
FLHBN	Stainless steel	

*! Finish: Satin anodized (Brushed nickel on request)



OPTIONAL ACCESSORY

Smart Entrance

- ◆ **Touch to open** allows you to open and lock doors with light pressure on the contact areas
- ◆ Easy installation



Special striking plate partition system:

Magnetic inlay
FSPSEM


Striking plate
FSPSE




FALLBROOK DOOR PROFILES

Profiles incl. seals – length 1,1 meters or 3 meters


FW2GD3SA	BASIS-W-3	Satin anodized	Frame profile for wall connection including frame seal
FW2GD3BN		Brushed nickle	
FW2GD3MBL		Matte black anodized	
FW2GD1SA	BASIS-W-1,1	Satin anodized	Basis-W profile
FW2GD1BN		Brushed nickle	
FW2GD1MBL		Matte black anodized	
FG2GD3SA	BASIS-G-3	Satin anodized	Frame profile for glass connection incl.2x clip profile, frame seal, stop seal and fixing seal frame seal
FG2GD3BN		Brushed nickle	
FG2GD3MBL		Matte black anodized	
FG2GD1SA	BASIS-G-1,1	Satin anodized	Basis-W profile
FG2GD1BN		Brushed nickle	
FG2GD1MBL		Matte black anodized	

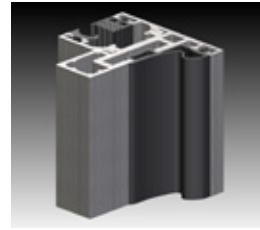


Basis-G

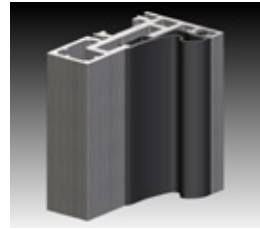

Basis-W

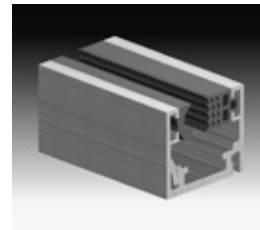

Frame



Top-frame

FALLBROOK DOOR PROFILE SETS

Profiles incl. seals and accessories – length 2x 2,45 meters and 1x 1,1 meters incl.

FTW2GDSA	OFFICE-SET-W	Satin anodized	EDM-B and attachment parts	FTG2GDSA	OFFICE-SET-G	Satin anodized	EDM-B and attachment parts
FTW2GDBN		Brushed nickle		FTG2GDBN		Brushed nickle	
FTW2GDMBL		Matte black anodized		FTG2GDMBL		Matte black anodized	

FALLBROOK FIXED GLAZING

Profiles incl. seals – length 3 meters

FW2GF3SA	FRAME-3	Satin anodized	Door profile	FC2GF3SA	TOP-FRAME-3	Satin anodized	Frame profile
FW2GF3BN		Brushed nickle		FC2GF3BN		Brushed nickle	
FW2GF3MBL		Matte black anodized		FC2GF3MBL		Matte black anodized	

FALLBROOK DOOR PROFILES & FIXED GLAZING

Profiles without seals - length 6 meters

FBD6SA	BASIS STOCK	Satin anodized	Door profile
FBD6BN		Brushed nickle	
FBD6MBL		Matte black anodized	
FCLPD6SA	CLIP STOCK	Satin anodized	Clip profile
FCLPD6BN		Brushed nickle	
FCLPD6MBL		Matte black anodized	
FRMD6SA	FRAME STOCK	Satin anodized	Fame profile
FRMD6BN		Brushed nickle	
FRMD6MBL		Matte black anodized	
FTPD6SA	TOP-FRAME STOCK	Satin anodized	Frame profile
FTPD6BN		Brushed nickle	
FTPD6MBL		Matte black anodized	

GLASS PARTITION GASKETS

Length always 50 meters, unless article number states 25 for 25 meters

FDJBL	EPDM-B	Black	Gaskets for door profile
FDJBL25		Black	
FDJGR		Grey	
FDJGR25		Grey	
FFPBL	EPDM 8/10/12	Black	Gaskets for door profile 8/10/12 mm
FFPBL25		Black	
FFPGR		Grey	
FFPGR25		Grey	
FFP16BL	EPDM 16	Black	Gaskets for door profile 16 mm
FFP16GR		Grey	
FRGBL	EPDM-F	Black	Fxing gaskets
FRGBL25		Black	
FRGGR		Grey	
FRGGR25		Grey	
		Grey	

FALLBROOK XL DOOR PROFILES


Profile incl. seals – length 1,1 meters or 3 meters

FXW2GD3SA	BASIS-W XL-3	Satin anodized	Zargenanschlussprofil door stop profile
FXW2GD3BN		Brushed nickle	
FXW2GD3MBL		Matte black anodized	
FXW2GD1SA	BASIS-W XL-1,1	Satin anodized	Zargenanschlussprofil door stop profile
FXW2GD1BN		Brushed nickle	
FXW2GD1MBL		Matte black anodized	
FXG2GD3SA	BASIS-G XL-3	Satin anodized	Zargenanschlussprofil door stop profile
FXG2GD3SABN		Brushed nickle	
FXG2GD3SAMBL		Matte black anodized	
FXG2GD1SA	BASIS-G XL-1,1	Satin anodized	Zargenanschlussprofil door stop profile
FXG2GD3BN		Brushed nickle	
FXG2GD3MBL		Matte black anodized	


FALLBROOK XL FIXED GLAZING

Profile incl. seals – length 3 meters


FXW2GF3SA	FRAME XL-3	Satin anodized	Fixed frame glazing profile
FXW2GF3BN		Brushed nickle	
FXW2GF3MBL		Matte black anodized	
FXC2GF3SA	TOP XL-3	Satin anodized	Fixed frame glazing profile
FXC2GF3BN		Brushed nickle	
FXC2GF3MBL		Matte black anodized	
FXG2GF3SA	FRAME T XL-3	Satin anodized	Profile for glass bump
FXG2GF3BN		Brushed nickle	
FXC2GF3MBL		Matte black anodized	

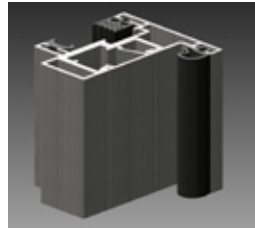


Basis-G-XL

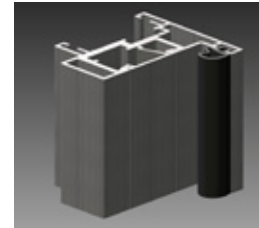


Basis-W-XL



Frame XL



Frame T XL



Top-Frame XL

FALLBROOK DOOR PROFILES & FIXED GLAZING

Profiles without seals - length 6 meters

FXBD6SA	BASIS STOCK XL	Satin anodized	Door profile
FXBD6BN		Brushed nickle	
FXBD6MBL		Matte black anodized	
FCLPD6SA	CLIP STOCK	Satin anodized	Clip profile
FCLPD6BN		Brushed nickle	
FCLPD6MBL		Matte black anodized	
FXCLPD6SA	CLIP BASIS STOCK XL	Satin anodized	Clip profile
FXCLPD6BN		Brushed nickle	
FXCLPD6MBL		Matte black anodized	
FXFRMD6SA	FRAME STOCK XL	Satin anodized	Frame profile
FXFRMD6BN		Brushed nickle	
FXFRMD6MBL		Matte black anodized	
FXFRMT6SA	FRAME T STOCK XL	Satin anodized	Profile for glass bump
FXFRMT6BN		Brushed nickle	
FXFRMT6MBL		Matte black anodized	
FXTPD6SA	TOP-FRAME STOCK XL	Satin anodized	Top-frame profile
FXTPD6BN		Brushed nickle	
FXTPD6MBL		Matte black anodized	

FALLBROOK XL GASKETS

Length always 50 meters, unless article number states 25 for 25 meters

FXDJBL	EPDM B XL	Black	Gaskets for door profile
FFPBL		Black	
FFPBL25		Black	
FFPGR	EPDM 20/22/24	Grey	Gaskets for door profile 20/22/24 mm
FFPGR25		Grey	
FFP14BL		Black	
FFP14GR	Grey		
FFP16BL	EPDM 26	Black	Gaskets for door profile 28 mm
FFP16GR		Grey	
FRGBL	EPDM-F	Black	Fixing gaskets
FRGBL25		Black	
FRGGR		Grey	
FRGGR25		Grey	
		Grey	

FALLBROOK ADAPTER PROFILES NY

Based on Fallbrook XL

FXNYF3SA	Satin anodized	Adapter profile Frame Plus 3 meters
FXNYF3MBL	Matte black anodized	
FXNY6SA	Satin anodized	Adapter profile Frame Plus 6 meters
FXNY6MBL	Matte black anodized	

FALLBROOK ACCESSORY

FXNYBSA	Satin anodized	Block
FXNYBMBL	Matte black anodized	